



CDR + JEEP GARBER

3300 HIGHWAY 17, GREEN COVE SPRINGS, FLORIDA 32043

OWNER

ARCHITECT


ADDENDA

Addendum Issued: NONE

Please review any Addendum issued after Date
09/20/22

ID: -1972

BIDDER NAME: _____

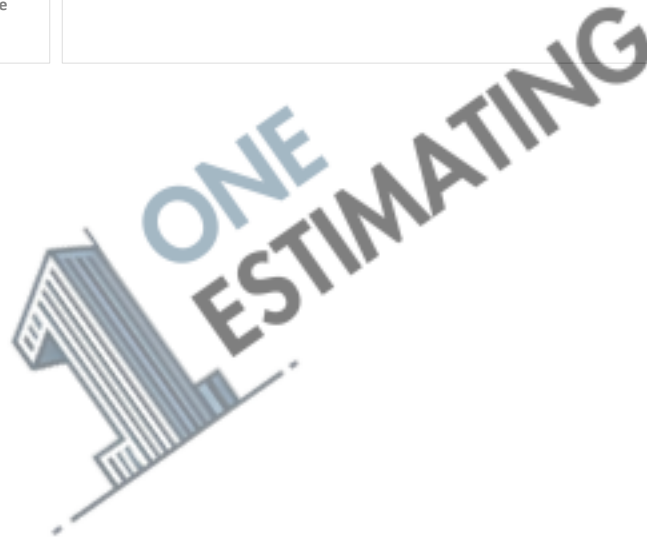

S#	DWG #	DETAIL #	CSI NO	DESCRIPTION	QTY.	QTY INCL WASTAGE 5%	UNIT	LABOR			MATERIAL (\$Per Unit)	EQUIPMENT (\$Per Unit)	COMPOSITE RATE/UNIT	TOTAL COST
								MHrs/ Unit	\$/Hour	(\$Per Unit)				
			010000	DIVISION 01 - GENERAL REQUIREMENTS										
1				MOBILIZATION	1		LS							
2				BOND & INSURANCE	1		LS							
3				SUPERVISION	1		LS							
4				SUBMITTALS & SAMPLES	1		LS							
5				TEMPORARY FACILITIES & CONTROLS	1		LS							
6				PROJECT SCHEDULE	1		LS							
7				CLOSEOUT PROCEDURES	1		LS							
8				PERMITS	1		LS							
Subtotal														\$ -
			040000	DIVISION 04 - MASONRY										
9	A101			CMU BLOCK										
				(12"x8"x16") CMU	8265	8678.25	EA							\$ -
10				(8"x8"x16") CMU	6855	7197.75	EA							\$ -
11	A101			SPLIT FACE CMU BLOCK										
				(12"x8"x16") Split Face CMU	8260	8673	EA							\$ -
				CMU HALF BLOCK										
				(12"x8"x8") Split Face CMU	930	976.5	EA							\$ -
				(12"x8"x8") CMU	320	336	EA							\$ -
				(8"x8"x8") CMU	75	78.75	EA							\$ -
15	A101			BOND BEAM										
				(8"x8"x16") Bond Beam (185LF)	140	147	EA							\$ -
16				(12"x8"x16") Bond Beam (407LF)	525	551.25	EA							\$ -
17	A101			SPLIT FACE BOND BEAM										
				(12"x8"x16") Split Face Bond Beam (1175LF)	1650	1732.5	EA							\$ -
18	A101			LADDER REINFORCEMENT										
				Ladder Reinforcement	18000	18900	LF							\$ -
19	A101			REBAR'S										
				Rebar's (Grade 60)	27690	29074.5	LB							\$ -
20	A101			CONCRETE GROUT										
				Concrete Grout	3965	4163.25	CF							\$ -
				INSULATION FILLED CELLS										
				Foamed in-Place Masonry Insulation	2750	2887.5	CF							\$ -
22	A101			CONCRETE LINTEL CAP										
				(8") Precast Concrete Lintel Cap	80	84	LF							\$ -
Subtotal														\$ -
Total.														\$ -
Add Contractor's overhead & profit @ 20%														\$ -
G.Total														\$ -

